





BOTTOM VIEW

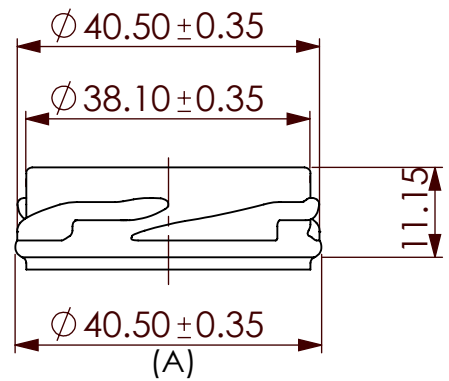

To 43mm TWIST OFF FD 157  
(B)

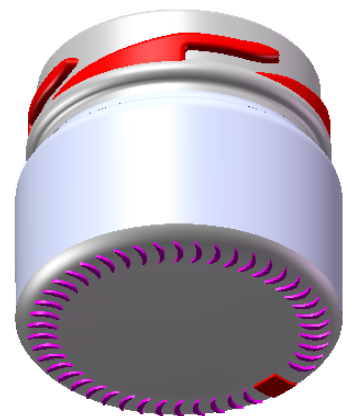

PROCESS		PRESS & BLOW						SPECIFICATION AGREEMENT ARE BASED ON TOLERANCE DIMENSIONS ONLY DO NOT SCALE DRAWING COPYRIGHT RESERVED. NOT TO BE COPIED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION FROM EKAM GLOBAL.			
MINIMUM THROUGH BORE			(B)	1	43 MM TWIST OFF WAS 43 MM LUG			08.11.08			EKAM GLOBAL PTY LTD
FILL POINT VERIFIED		NO	(A)	1	40.50±0.35 WAS 41.0±0.35 MM. REV.AS PER HERO JAR NECKRING			05.05.08			
TILT ANGLE		-	No.	REV.No.	REVISION			DATE	CHK	DRG	
MAXIMUM DEPTH OF STANDARD ENGRAVING		-	FILL-POINT		ml ± ml			TITLE : 31 ML. JAM JAR			
MAX. GAS VOLUMES		-	BRIMFUL CAP.		33.50 ± 1.40 ML			CUST:		CHECKED:	
REF DRG No :- CD-6292			WEIGHT		45.0 ± 3.0 GMS.			DRAWN: 31.03.2008		APPROVED:	
MOULD EQUIPMENT ORDERED BY			FINISH		43 MM TWIST OFF FD 157			COLOUR	FLINT	DRAWING No. 42956	
PLANT	B						SURFACE TREATMENT		NO		
											REV (B)