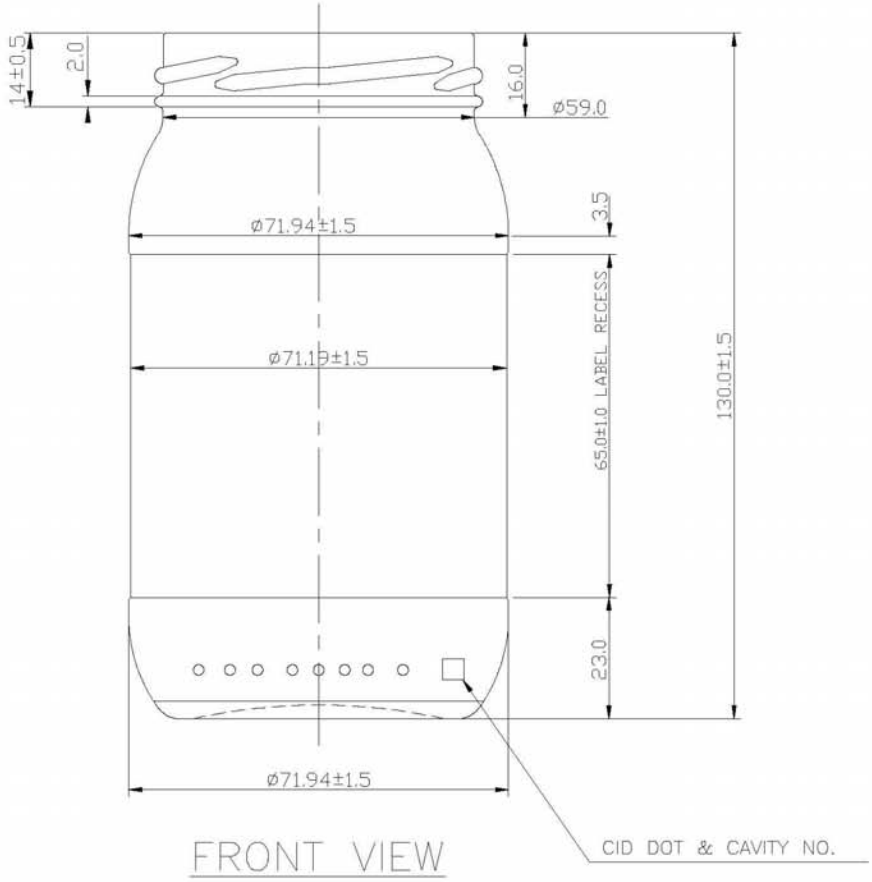

FRONT VIEW

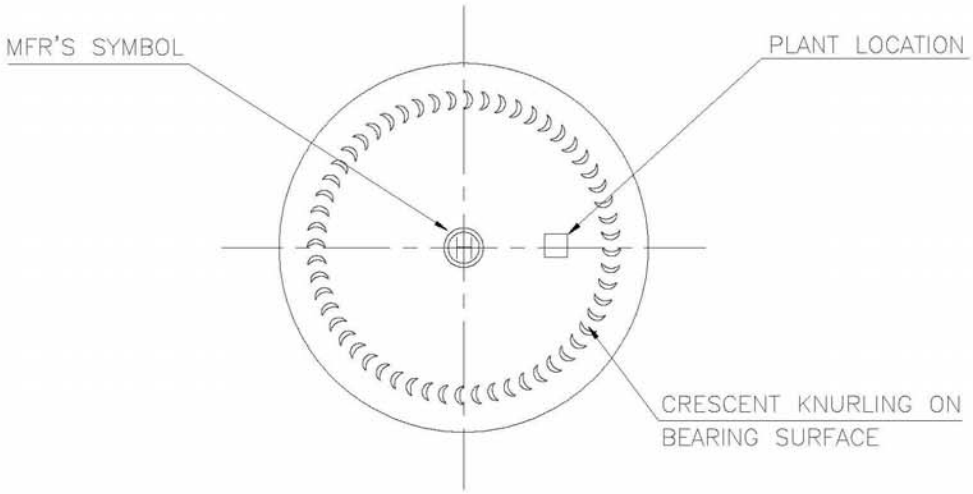

BOTTOM VIEW

ALL DIMENSIONS ARE IN MILLIMETERS

PROCESS	PRESS & BLOW						
MINIMUM THROUGH BORE	–						
FILL POINT VERIFIED	–						
TILT ANGLE	21.3°	SYM	No.	REVISION	DATE	DRC	
MAXIMUM DEPTH OF STANDARD ENGRAVING	0.4	FILL–POINT CAPACITY					
MAX. GAS VOLUMES	N.A.	BRIMFUL CAPACITY	400ml.±7.0				
REF.DRG. No.23046,CD1022		WEIGHT	200gms ±10.0				
		FINISH	63mm LUG CAP WITH BEAD	COLOUR	FLINT		
		SURFACE TREATMENT	NO				

SPECIFICATION AGREEMENT ARE BASED ON TOLERANCED DIMENSIONS ONLY
DO NOT SCALE DRAWING

COPYRIGHT RESERVED.

EKAM GLOBAL PTY LTD

TITTLE	400 ml STD JAR		
CUSTOMER:	GENERAL MARKET	APPROVAL	
DRAWN:	13.09.11	CHECKED: KS/MK	
D.R.C.: SA	① DESIGN:	② C.P.O:	
SCALE	DRAWING No.		A3
FULL SIZE	00287		REV.